


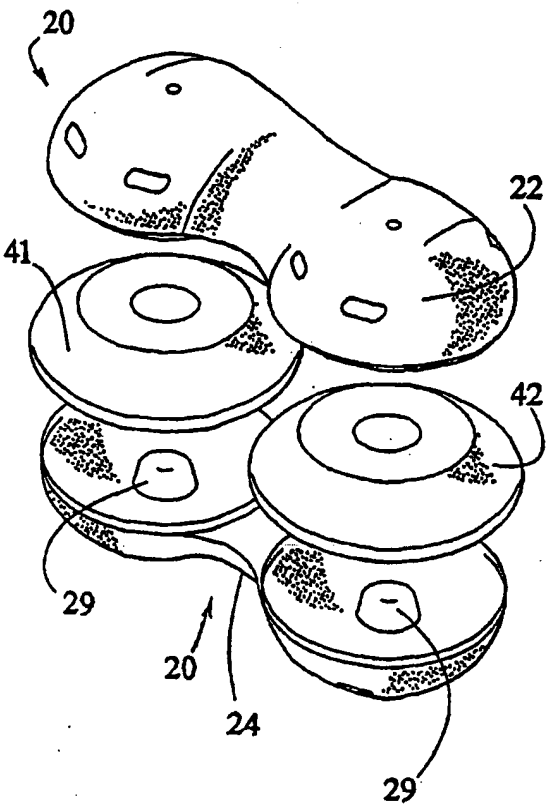

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification 6 :</b> <b>A61F 2/44</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 00/13619</b> <b>(43) International Publication Date:</b> 16 March 2000 (16.03.00)
<b>(21) International Application Number:</b> PCT/US99/20457 <b>(22) International Filing Date:</b> 3 September 1999 (03.09.99) <b>(30) Priority Data:</b> 60/099,277 4 September 1998 (04.09.98) US <b>(71) Applicant (for all designated States except US):</b> SPINAL DYNAMICS CORPORATION [US/US]; Suite 110, 9655 Southeast 36th Street, Mercer Island, WA 98040 (US). <b>(72) Inventor; and</b> <b>(75) Inventor/Applicant (for US only):</b> BRYAN, Vincent [US/US]; Suite 110, 9655 Southeast 36th Street, Mercer Island, WA 98040 (US). <b>(74) Agent:</b> PARKHURST, Todd, S.; Hill & Simpson, Sears Tower, 85th floor, 233 South Wacker Drive, Chicago, IL 60606 (US).		<b>(81) Designated States:</b> AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i>
<b>(54) Title:</b> PEANUT SPECTACLE MULTI DISCOID THORACO-LUMBAR DISC PROSTHESIS <b>(57) Abstract</b> <p>A small profile, peanut spectacle-shaped prosthetic disc device (20) is provided. The device housing is comprised of two longitudinally split hollow halves (22, 24), between which are contained multiple discoïd shaped resilient bodies (41, 42) which may be of a polymeric type, or they may contain hydrogel. These bodies may lie in concave surfaces (51, 52) located on the interior of each side of the split cylindrical housing. The housing halves, even under maximum physiological loads, do not contact one another directly. The shell shape permits relatively easy introduction of the intervertebral spaces in the thoracic or lumbar region of the human spine.</p> 		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

**SPECIFICATION****TITLE****PEANUT SPECTACLE MULTI DISCOID THORACO-LUMBAR DISC  
PROSTHESIS**

5           This invention relates to the design and use of a unique disc prosthesis for the lumbar and thoracic spine. By placing one or more ovoid resilient prosthetic nuclei in series inside a peanut-shaped housing of metal ceramic or polymeric material, which housing is shaped so that it is separated into two sections longitudinally, a thin profile prosthesis can be created which will allow placement of the device through a  
10   small opening for implant into the thoracic or lumbar portion of the spine.

U.S. Patent 5,674,296 is incorporated by reference.

**BACKGROUND OF THE INVENTION**

Degenerative disc disease, including disc herniation, may produce disabling symptoms of local pain, radiculopathy or myelopathy in an otherwise clinically stable  
15   spine, and may be unresponsive to non-surgical treatment. Several surgical treatments are available to address the symptoms of degenerative disc disease when non-invasive therapies are not effective. These surgical treatments include decompression, discectomy and fusion. These treatments, and in particular the discectomy and fusion procedures, provide relief of clinical symptoms but they do not restore normal or near  
20   normal range of motion or cushioning to the affected functional spinal unit (FSU). This can result in acceleration of the degenerative process in spinal discs adjacent to the original surgical operation site. This degenerative process can, in turn, require additional surgical intervention.

Open surgery and endoscopic techniques are often used to provide access to  
25   the targeted intervertebral disc space. Posterior, postero-lateral, and anterior approaches allow placement of instrumentation to facilitate exposure of the degenerated disc and the insertion of bone grafts or fusion cages to accomplish bony fusion.

Because of anatomical structure considerations and instrument size restrictions  
30   associated with minimally invasive surgical techniques in the anterior lumbar spine, the insertion of a functional disc prosthesis equal in size to the natural disc creates

risks due to mechanical interferences with critical vascular structures.

A functional disc prosthesis which provides for a full range of motion of the FSU and for cushioning between two adjacent vertebrae while maintaining stability, intervertebral body spacing and lordosis, is desirable.

5           More specifically it is an object of the invention to provide a disc prosthesis having a small or narrow profile. The novel exemplary prosthesis has an exterior shape like that of a peanut shell. This peanut shaped housing is comprised of two longitudinally split halves. Each housing half is separated from the other at all times by disk shaped resilient bodies contained therein, and is strong enough to support the  
10       loads to which it shall be subjected during the activities of daily living. The discoid nuclei are of smaller diameter than the natural discs they replace, and are positioned in the shell concave interiors of the peanut shaped housing. The housing is configured to accommodate the restrictions imposed by the limited anatomical space available for the surgical placement of the implant, and is small so as to utilize implantation  
15       procedures and instrumentation such as those used in an endoscopic procedure.

It is a further object of the invention to provide geometry to engage concave mating surfaces on the vertebral bodies or bones so as to provide proper stability and proper positioning of the opposing engaged vertebrae or vertebral bodies.

Another object is to obviate the need for a second surgical site for bone graft  
20       harvesting as may be required when spinal fusion cages are implanted.

And it is a further object of the invention to provide a sheath so as to completely surrounded and enclose the space occupied by the resilient bodies between the two housing halves, thereby restricting the migration of debris outside the prosthesis, restricting cancellous tissue ingrowth into the device, and providing a  
25       sealed space around the prosthetic nucleus in which lubricant may be contained.

Still another object of the invention is to provide a disc prosthesis which will permit motion between the housing halves.

A further object of the intention is to provide a disc prosthesis which will provide for cushioning between the housing halves.

30       It is a still further object of the invention to provide a disc prosthesis which may be used alone or in parallel array with similar prostheses.

It is yet another object to provide a housing having one or more ports through which a liquid (for example, a saline fluid, hyaluronic acid, or similar lubricating fluid material including for example a hydrogel material) can be introduced into the housing interior space confined within the sheath and partly occupied by the disc for purposes of lubrication, spacing, and/or cushioning. A plug, screw or other can also be provided to seal closed the port following introduction of that material.

Other objects and advantages of the invention will become apparent to those skilled in the art upon reading the following detailed description and upon reference to the drawings. Throughout the drawings, like reference numerals refer to like parts.

#### 10                    DESCRIPTION OF THE DRAWINGS

Figure 1 is a top plan view of the novel spinal prosthesis.

Figure 2 is an end view of the prosthesis shown in figure 1.

Figure 3 is a sectional view taken substantially in the plane of line 3 - 3 in figure 1.

15                    Figure 4 is an exploded view of the novel prosthesis.

Figure 5 is a top plan view of the interior of one of the shelves comprising the novel prosthesis.

Figure 6 is a side elevational view of the shell half shown in figure 5.

Figure 7 is an end view of the shell half shown in figures 5 and 6.

20                    Figure 8 is a fragmentary view of the shell half shown in figure 7, but showing in further detail the half edge shape which is adapted to engage the implant sheath and a circlage wire.

Figure 9 is an exploded view showing the interiors of the shell halves.

25                    While the invention will be described in connection with a preferred embodiment, it will be understood that it is not intended to limit the invention to this embodiment. On the contrary, it is intended to cover all alternatives, modifications and equivalents as may be included within the spirit and scope of the invention as defined by the appended claims.

30                    To accomplish the objectives set out above, the novel exemplary disc prosthesis 10 includes, as shown in the drawings, a peanut shaped housing 20. The housing 20 includes an upper half housing 22 and a lower half housing 24.

As particularly shown in figures 2, 3, and 4, a plurality of resilient, viscoelastic discs 41, 42 are interposed between the upper half housing 22 and the lower half housing 24 to maintain the housing halves separate from one another and to provide for a defined range of motion between the housing halves and, consequently, for the implant patient's spine. Alternatively, the discs 41, 42 may be made of a suitable hydrogel. The discs can have a relatively soft and resilient interior and a relatively hard and durable exterior. If desired, generally conical bosses or posts 29 can fit into recesses 33 formed in the discs 41, 42 to provide stability and limitation against excessive motion. Also if desired, these posts 29 can be provided with small passageways 31 to permit the introduction of fluids or gel into the interior of the assembled implant. As shown in figure 3, circlage wires 37, 38 or other known devices can be fit into grooves 41 (figure 8) formed at the edge of the shell halves 22, 24 so as to attach and retained a fluid-retaining sheath 39, as suggested in U.S. Patent 5,674,296.

Ports 31 can be formed in the shell halves 22, 24 to permit lubricating fluids or gels to be introduced into the interior of the assembled implant. The ports 31 can later be sealed by a plug, a screw or the like if desired to prohibit the later expulsion or loss of the introduced fluid or gels. Recesses 47, 48 permit bone ingrowth and consequently firm, permanent attachment of the implant to the mating vertebral bone surfaces.

The prosthetic device 10 can be implanted in the thoracic or lumbar region of the spine through a small surgical opening. One device 20 containing two or more discs 41, 42 may be used, or by placing two such devices 20 in parallel, each containing two or more ovoid discs in series, a full range of motion of the functional spinal unit (FSU) can be achieved. If the discoid material possesses resilient, viscoelastic properties, with the housing being split with the internally placed ovoid discs maintaining the separation of the upper and lower housing members, a cushioning effect may also be realized.

As suggested in figures 5 and 9, each ovoid disc 41, 42 may be partly surrounded and retained by a concave surface 51, 52 formed or contained within the housing, and contoured to accept the upper and lower surface shape of each of the ovoid discs 41, 42 so that the housing 20 comprising the two or more halves or paired shells 23, 24 may slide and/or rotate over the surface of the discs 41, 42 to provide for joint space separation and motion.

The device may be inserted via open or minimally invasive techniques including endoscopy, or by a variety of known surgical anterior, posterior, lateral or other approaches where adequate anatomical space is available. Though the prosthesis is inserted as a single cylindrical unit, its final position is such that one half of the housing  
5 is left exclusively in contact with the cephalad vertebral bone with the caudal vertebral bone superior end plate. The discoid vertebral bodies between the cylindrical housing halves contain two or more concave surfaces, allow movement by providing for sliding and rotating in multiple directions and cushioning in response to physiological loads placed upon them.

**The Following Is Claimed As Invention:**

1. A disc prosthesis comprising, in combination, a peanut shaped housing, the housing including an upper half and a lower half and a plurality of resilient, viscoelastic discs interposed between the upper half housing and the lower half housing to maintain  
5 the housing halves separate from one another.
2. A disc prosthesis according to claim 1 wherein said discs are ovoid in shape.
3. A disc prosthesis according to claim 1 wherein each disc is partly surrounded by a concave surface formed within said housing.
4. A disc prosthesis affixed within a human spine, the prosthesis comprising a  
10 peanut shaped upper half housing engaging the cephalad vertebral bone inferior end plate and cancellous bone; a peanut shaped lower half housing engaging the caudal vertebral bone superior end plate and cancellous bone; and a plurality of separate, resilient discs interposed between the housing halves.
5. A disc prosthesis according to claim 4 wherein each disc is partly surrounded  
15 by a concave surface formed within one of said housing halves.
6. A disc prosthesis according to claim 1 in which each housing half is at least partly defined, in its interior, by a concave surface.
7. A plurality of disc prostheses located within a human spine, each prosthesis comprising an upper half housing engaging a cephalad bone inferior end plate and  
20 cancellous bone; a lower half housing engaging a caudal vertebral bone superior end plate and cancellous bone; and resilient material interposed between the housing halves.
8. A plurality of disc prostheses according to claim 7 wherein the prosthesis shell has recesses defined in its exterior surface to permit bone ingrowth.
9. A viscoelastic prosthetic disc for use in a human spinal implant, the disc having  
25 viscoelastic properties, the prosthetic disc having convex external surfaces for sliding engagement with concave surfaces formed on the interior of rigid upper and lower half housings
10. The disc of claim 9 wherein said disc has a relatively soft and resilient interior and a relatively hard and durable exterior.
- 30 11. A disc prosthesis comprising, in combination, a housing, the housing having an exterior surface defining a local angle or spectacle-like formation, the housing











including at least two rigid, confronting and complimentary parts, the prosthesis further comprising at least one resilient, viscoelectric disc interposed between the housing parts to maintain the housing parts separate from one another but to provide cushioning between the housing parts and to permit limited motion from between the housing parts.

5           12.     A disc prosthesis according to claim 11 including a sheath attached to said housing halves.

          13.     A disc prosthesis according to claim 11 in which a sealable portal is defined in said housing, the portal defining a passageway through which a lubricant or irrigant can be introduced into space between the nucleus and the housing interior  
10     surface.

1/2

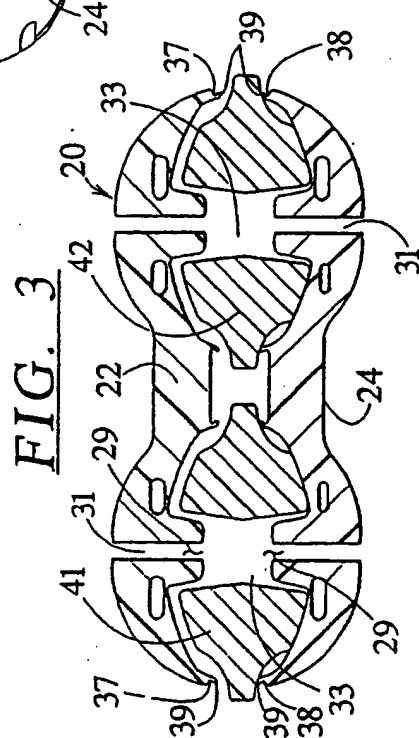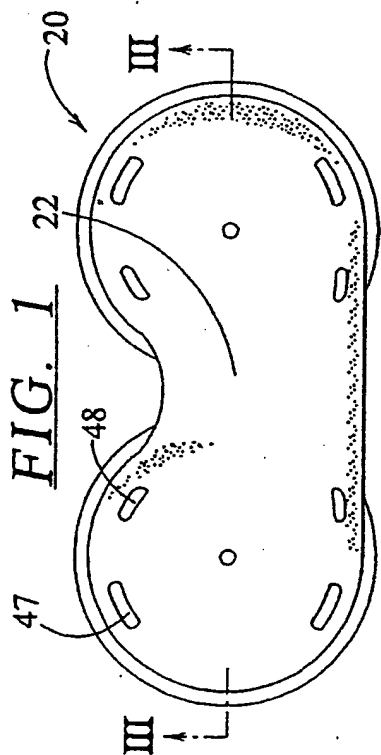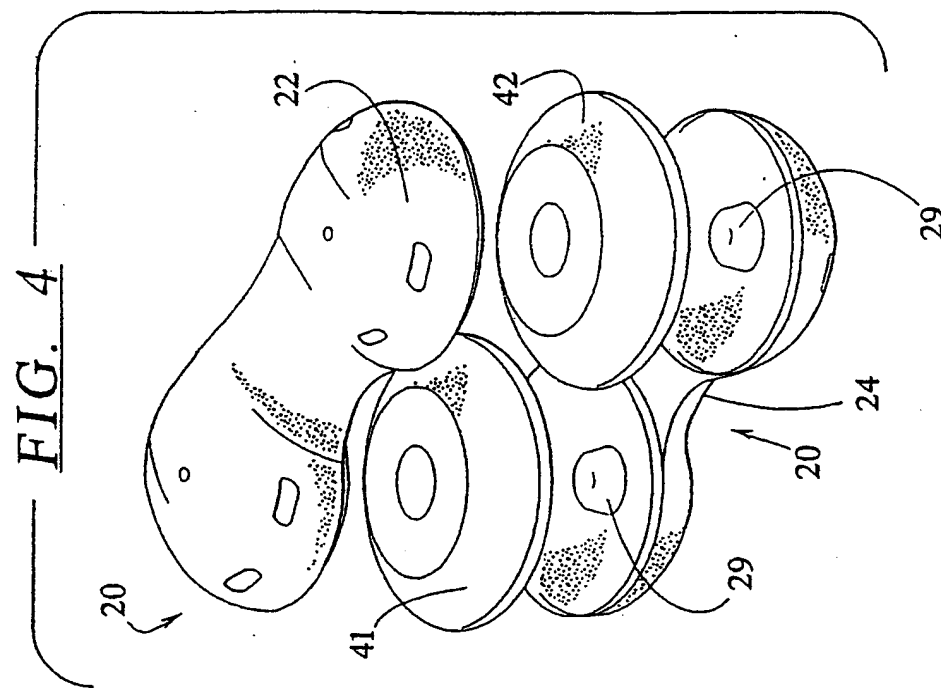

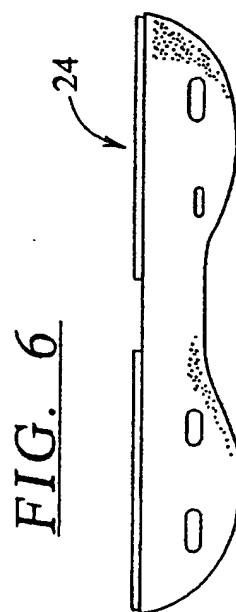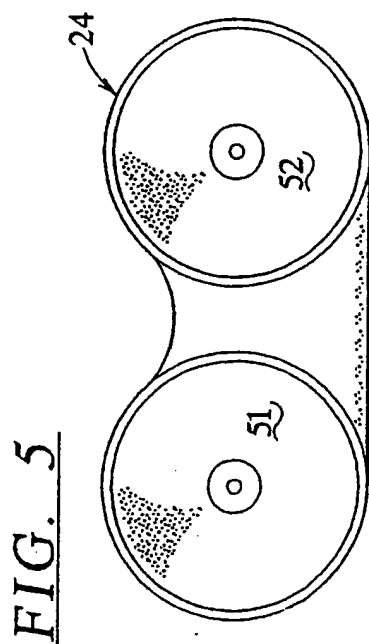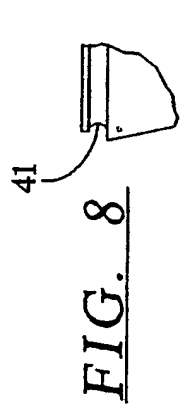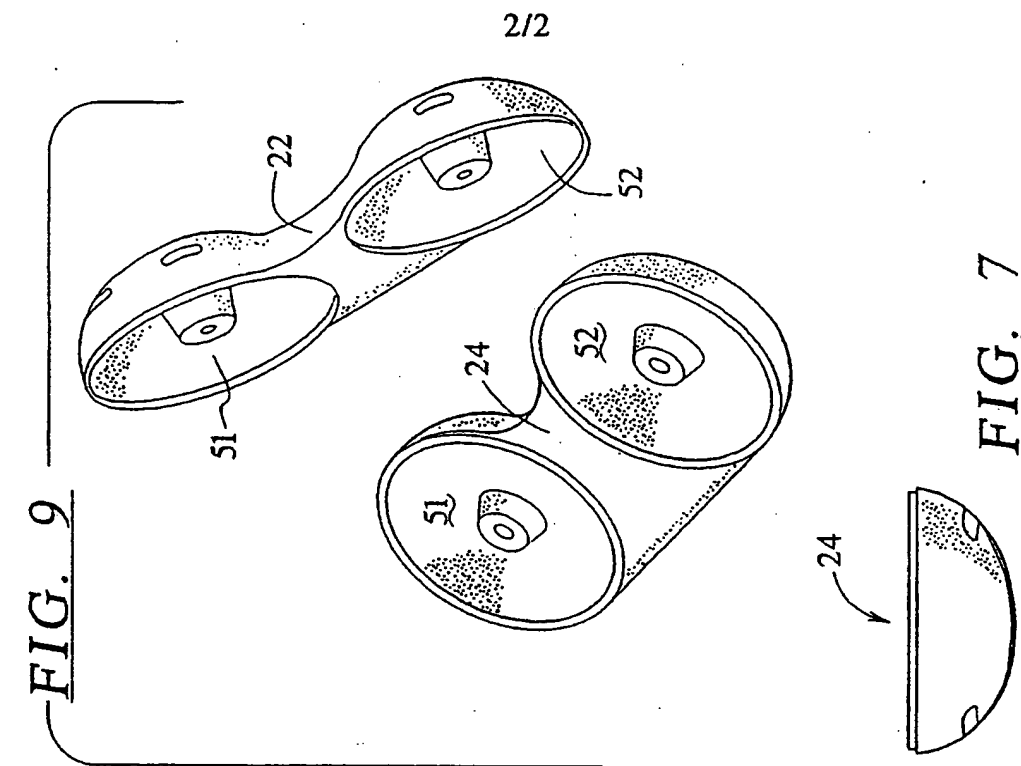

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US99/20457

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(6) :A61F 2/44

US CL :606/61; 623/17

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 606/61; 623/17

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EAST, WEST

Search Terms: disc prosthesis

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X — Y	US 5,782,832 A (LARSEN et al.) 21 July 1998, col. 6 lines 47-49; col. 7 lines 41-47 and 65-67, and col. 8 lines 1, 2 and 60-62.	7, 8 ----- 9-12
Y	US 5,507,816 A (BULLIVANT) 16 April 1996, col. 3 lines 35 and 36; and col. 4 lines 18, 19 and 29-34.	7-10
Y	US 5,236,460 A (BARBER) 17 August 1993, col. 2 lines 11-15, and col. 2 lines 27 and 28.	11, 13
A	US 4,917,704 A (FREY et al.) 17 April 1990, col. 2 lines 65 and 66, and col. 3 lines 8-16.	1-6

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*A* document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*E* earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*A* document member of the same patent family
*O* document referring to an oral disclosure, use, exhibition or other means	
*P* document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

01 NOVEMBER 1999

Date of mailing of the international search report

02 DEC 1999

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

BRIAN PELLEGRINO

Telephone No. (703) 306-5899

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**